

Furlers FX+

design by Facnor

LIGHT / EASY TO FIT / AESTHETIC



Various attachments
Alternative 2-to-1 block fitting
(see reverse page)



Secured sail connection

Smooth push spring release device (except from FX+900 secured with clevis pin); user friendly; Unique design "by Facnor"



Easy operation

Captive quick release pin
HR stainless steel

Anti-impact cover for swivel
(delivered in standard kit)
In neoprene, high-visibility marking



Easily fitted furling line

Thanks to a round and smooth notch on the drum edge



Carbon housing
Strong mechanism bodies
Machined from one single piece



360° orientating line exits
Stainless steel guide



Adjustable fastenings
Top and bottom adapted attachments (see reverse page)



New FX+ range of Gennaker/Code Zero furlers

FX+ evolution Endless line drum, large sized diameter for better control

FX+ models	FX+900	FX+1500	FX+2500	FX+4500	FX+7000	FX+12000	FX+20000
Boat length (m) (feet)	6 to 10.5 m 20 to 30'	10 to 12 m 30 to 40'	12 to 14 m 40 to 45'	13 to 16 m 42 to 55'	16 to 20 m 55 to 70'	+20 m +70'	+25 m +82'
Max Gennaker or Code zero area	30 m ² 322 ft ²	55 m ² 590 ft ²	90 m ² 969 ft ²	140 m ² 1500 ft ²	250 m ² 2690 ft ²	350 m ² 3770 ft ²	+500 m ² +5380 ft ²
SWL*	0.9 T	1.5 T	2.5 T	4.5 T	7 T	12 T	20 T



Optional attachments & accessories

SR spliced ropes Quality selected ropes for a optimum grip and no excess of thickness.

SR models	SR06	SR08	SR10	SR12+
FX+ ref	900	1500 / 2500	4500 / 7000	12000 / 20000
Ø (mm) x length (m)	6 x 12 or 16	8 x 16 or 20	10 x 20 or 32	on request




TSL stanchion twin leads Ideal for a fast installation.

TSL models	TSL25	TSL28
Stanchion Ø (mm)	25	28




SB snatch blocks / pivoting carbon cheeks Easy rotation under high loads.

SB models	SB2500	SB4500	SB7000
FX+ ref	2500	4500	7000
Sheave Ø (mm)	50	57	64
Height (mm)	77	84	93
Weight (g)	281	341	429
SWL*	2,5T	4,5T	7T

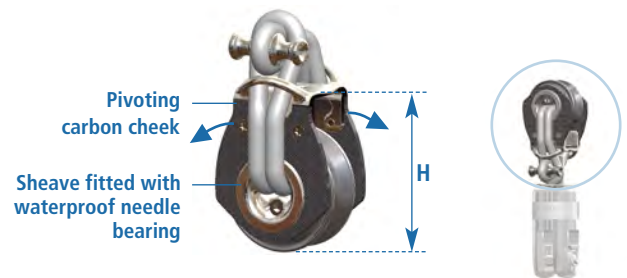


SSH stainless steel solid sheaves Compact and fitted with quick release pin.

SSH models	SSH1500	SSH2500	SSH4500	SSH7000
FX+ ref	1500	2500	4500	7000
Height (mm)	49	62	70	84
Weight (g)	113	200	320	471

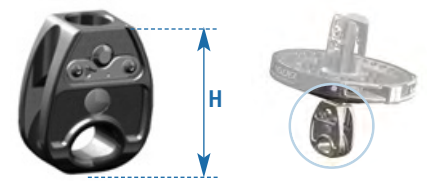

AST asymmetric spinnaker thimbles Rotating tack fitting, sail furls in from head to tack.


AST models	AST2500	AST4500	AST7000
FX+ ref	2500	4500	7000
Height (mm)	82	92	119
Weight (g)	426	581	1114

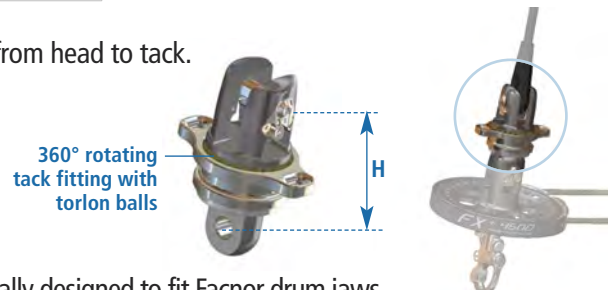

FCI stainless steel & FC aluminium thimbles for anti-twist rope

Models	FCI1500	FCI2500	FCI4500	FC7000
FX+ ref	1500	2500	4500	7000
Rope Ø (mm)	8	12	12/14/16	16/18/20
For pin Ø (mm)	8	10	12	14

Specially designed to fit Facnor drum jaws. Thimbles efficiently transmit rotation.



*The SWL is the maximum safe working load over which distortions of the furler can appear.