

# STAINLESS STEEL SWAGE TERMINALS

## Swage Shackle Toggle

### Benefits


Electrical upsetting with beneficial grain structure and low stress levels to reduce fatigue.

Free from structural welds which may reduce the strength and integrity of the product.

All eyes are manufactured from solid bar - no welding involved.

Inspection certificate BS EN 10204 3.1B available on request (This must be specified at the time of order).

High quality finish and excellent polish

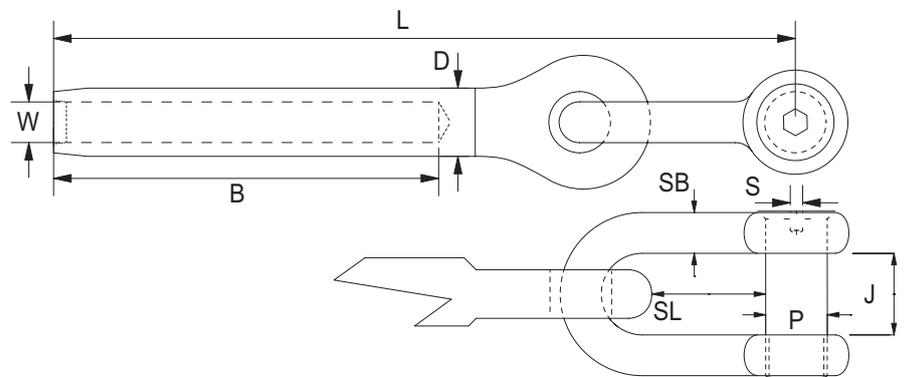

### Swage Shackle Toggles

| Product Code | W    | P      | D      | B     | SB     | SL   | S   | J    | L     | Weight |
|--------------|------|--------|--------|-------|--------|------|-----|------|-------|--------|
| SST03        | 3mm  | 6mm    | 6.3mm  | 39mm  | 5mm    | 14mm | 3mm | 14mm | 82mm  | 25g    |
| SST04        | 4mm  | 8mm    | 7.5mm  | 45mm  | 6mm    | 16mm | 4mm | 20mm | 101mm | 48g    |
| SST05        | 5mm  | 9.5mm  | 9.1mm  | 52mm  | 8mm    | 22mm | 4mm | 22mm | 118mm | 89g    |
| SST06        | 6mm  | 11mm   | 12.7mm | 64mm  | 9.5mm  | 27mm | 5mm | 25mm | 141mm | 179g   |
| SST07        | 7mm  | 12mm   | 14.3mm | 70mm  | 11mm   | 32mm | 5mm | 27mm | 158mm | 273g   |
| SST08        | 8mm  | 14.3mm | 16.0mm | 80mm  | 12.7mm | 36mm | 5mm | 29mm | 179mm | 407g   |
| SST10        | 10mm | 16mm   | 18.0mm | 100mm | 14.3mm | 42mm | 6mm | 29mm | 216mm | 684g   |
| SST12        | 12mm | 19mm   | 21.4mm | 132mm | 16mm   | 45mm | 6mm | 32mm | 263mm | 1027g  |
| SST14        | 14mm | 22.2mm | 25.0mm | 156mm | 19mm   | 63mm | 8mm | 38mm | 309mm | 1508g  |
| SST16        | 16mm | 25.4mm | 28.2mm | 176mm | 22mm   | 63mm | 8mm | 45mm | 351mm | 2525g  |

Unique to Petersen Stainless Rigging